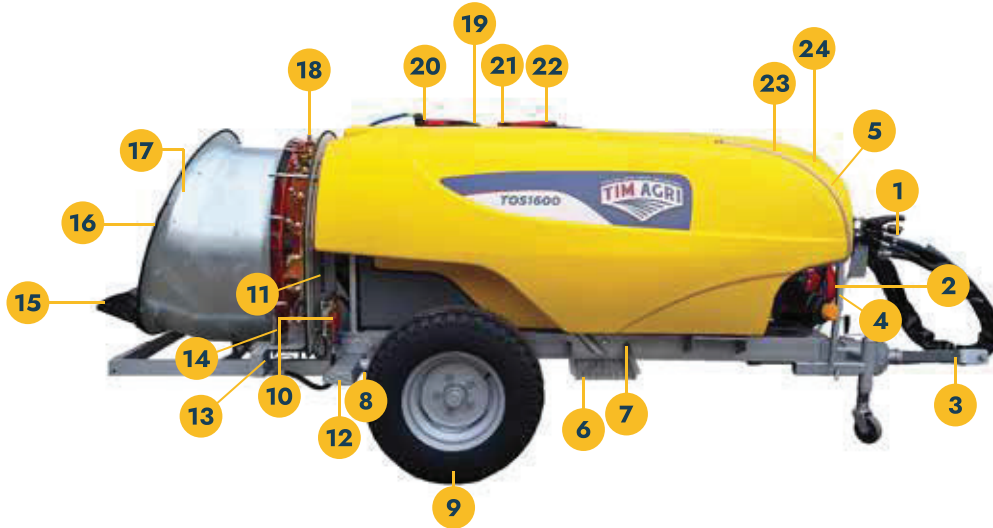












These TimAgri orchard sprayers ensure an improved angle of penetration and homogenous coverage during spraying. With a focus on low maintenance and using cleaner air during spraying.

## PRODUCT COMPONENT



 <p><b>1</b> Annovi Reverberi By Matic 50 control unit</p>	 <p><b>2</b> Annovi Reverberi AR 1604 pump with a flow rate of 153l/min &amp; 50bar pressure</p>
 <p><b>3</b> Ring draw-bar with jockey wheel</p>	 <p><b>4</b> Suction Filter with check valve Filtering Capacity 160-220 l/min</p>
 <p><b>5</b> Hydraulic Tank Agitator 1 Unit</p>	 <p><b>6</b> 2 x Cold galvanized painted and baked footstep</p>
 <p><b>7</b> Cold galvanized painted and baked chassis</p>	 <p><b>8</b> Adjustable ground clearance up to maximum of 40cm</p>
 <p><b>9</b> Tires - 10.0/75-15.3</p>	 <p><b>10</b> Brass line filters (2 Units)</p>

 <p>Bondioli Pavese Bima gearbox with 2 gears (1:3,6 - 1:4,5)</p>	 <p>Mud scrapper - Stop Lights</p>
 <p>2 x spray gun outlets</p>	 <p>Air deflector</p>
 <p>Fan unit leaves protector</p>	 <p>250 mm aluminum core with 10 plastic blades, right turning, 45° angle, adjustable angles</p>
 <p>Galvanized 910mm angled air intake Tower fan provides uniform air distribution and increases clean air used during spraying.</p>	 <p>Braglia M62 nozzle fixed and adjustable sides with 1.2 / 1.5mm ceramic tips (10 + 10 + 2 total 22 units)</p>
 <p>Tank filling ejector</p>	 <p>Tank rinsing Jet</p>
 <p>Hydraulic powder mixer</p>	 <p>Threaded Tank Lid Basket Filter</p>
 <p>Hose level indicator</p>	 <p>UV polyethylene tank equipped with clean &amp; hand washing features</p>

## SPECIFICATIONS

CODE	TANK L	PUMP	NOZZLE	FAN	CONTROL UNIT	FAN SPEED
TIMA506	1600 L	AR 1604/153 LT/min	Braglia M62 16 Unit	910 mm	AR BY - MATIC	2 Gears
TIMA507	2000 L	AR 1604/153 LT/min	Braglia M62 16 Unit	910 mm	AR BY - MATIC	2 Gears