










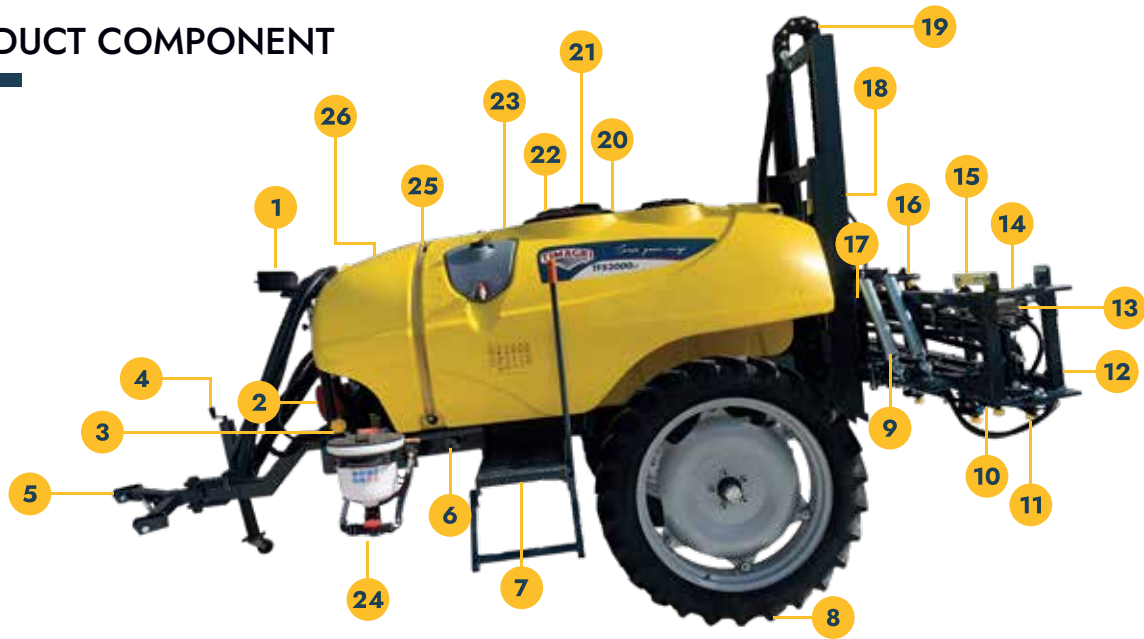

The TFS2000 ADK 16m sprayer is a favourite amongst farmers who value an efficient, convenient and durable sprayer.

PRODUCT COMPONENT



<p>1</p>  <p>5 way control box enables easy section control and prevents pressure deviation in section opening/closing. Safe application is ensured without spraying hose in-cab</p>	<p>2</p>  <p>Annovi Reverberi AR 135 BP C pump with a flow rate of 128 l/min & 20 bar pressure</p>
<p>3</p>  <p>Suction filter with check valve</p>	<p>4</p>  <p>Chassis adjustment jack</p>
<p>5</p>  <p>Wide angle drawbar</p>	<p>6</p>  <p>Tank drain valve</p>
<p>7</p>  <p>Ladder with grip</p>	<p>8</p>  <p>270/95R44 Tyres</p>
<p>9</p>  <p>The balance spring dampens the wobble when passing through an uneven place.</p>	<p>10</p>  <p>It keeps the boom in a parallel line in manual boom systems and prevents it from moving during operation.</p>

<p>11</p> 	<p>Agrotop Airmix Anti-Drift Nozzle- Red, Yellow, Grey</p> <p>Nozzles enable farmers to apply pesticides within an optimum time frame, even when weather conditions are less favorable, and large areas must be treated.</p> <ul style="list-style-type: none"> • Drift reduction up to 90 % depending on size and pressure • Protects environment • Saves money • Excellent penetration • Spray applications are more independent of weather conditions • Reduce contamination of the environment, neighbor crops or persons with chemical spray 	<p>12</p>  <p>Springs that facilitate manual closing also prevent the boom from opening when closed.</p>
<p>15</p> 	<p>Lock mechanism that prevents it from closing when the boom is in the open operating position.</p>	<p>13</p>  <p>1/2" stainless steel nozzle holder pipe</p>
<p>17</p> 	<p>Piston with elevator system that provides up and down movement of the boom</p>	<p>14</p>  <p>16 m, light and the durable semi-automatic boom is made of ST 52 steel</p>
<p>19</p> 	<p>Hose/ Cable protection</p>	<p>16</p>  <p>Lock system that prevents the boom from opening during transportation</p>
<p>21</p> 	<p>Tank rinsing jet</p>	<p>18</p>  <p>5 units of line filters</p>
<p>23</p> 	<p>Hydraulic tank agitator Ø2.0 / Ceramic</p>	<p>20</p>  <p>Hinged tank lid</p>
<p>25</p> 	<p>Tank level indicator with hose</p>	<p>22</p>  <p>Hydraulic powder mixer</p>
<p>26</p> 	<p>UV polyethylene tank equipped with clean and hand washing features</p>	<p>24</p>  <p>Arag 30 L Niagara mixing tank</p>

SPECIFICATIONS

CODE	TANK L	PUMP	NOZZLE	BOOM	TRACTOR HP	CONTROL UNIT
TIMFA603	2000 L	AR 135 /128 l/min	33 Unit	16m	80	5 Way Control Box